XCMG | SOLID TO SUCCEED

CE

SCISSOR LIFT
XG0607DC

Standard configuration

Work Area
- Withdrawable Platform Extension With Position Lock
- Lanyard Attach Points
- Self-Locking Half-Height Swing Gate And Folding Guardrail

Drive
- Rear-Wheel Drive

Performance
- Travel Driven By DC Motor
- Full Proportion Travel And Lift Control
- 25 % Gradeability

Power
- DC Maintenance-Free Battery

Applicability
- Lubrication-Free Bearing
- Swing-Out Component Tray
- Brake Release For Towing


Safe
- Emergency Stop Devices On Platform And Ground Controls
- Anti-Slipping Metal Platform
- Load Sensing Alarm System
- Descent Alarm
- 3-Second Descent Delay
- Multi-Axis Tilt Sensor
- Multi-Disc Brake
- Boom Maintenance Lock
- Auto Brake System
- Pothole Protection Device
- Fault Diagnosis System
- Electric Horn
- Automatic Speed Reduction At Height
- Charging Protection System

Other Features
- Removable Platform Control
- Intelligent Charger
- Hourmeter
- Side Fork Pockets
- Flashing Indicator Light
- User-Friendly Control System
- Platform Control With Battery Level Display
- Manual Platform Descent Valve
- Tilt Sensor And Audio Alarm

Working height
7.8/6.5 meters

Lift capacity
230Kg

Electric
power

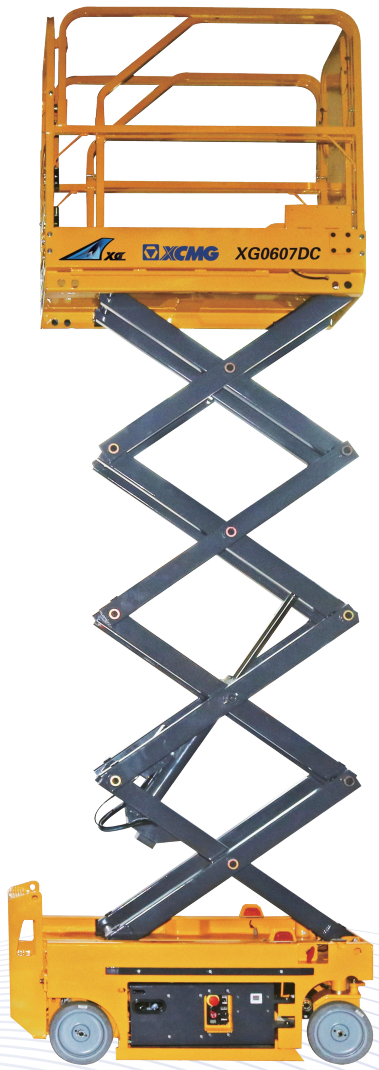

Optional configuration

- Platform Searchlight
- Platform External Power Supply
- Air Line
- Platform Fire Extinguisher
- Platform Foot Pedal

BMD KRAN-TRANS D.O.O.

Sedmog Jula 23b, 11262 Velika Moštanica, Beograd, Srbija
info@bmdkrantrans.rs


XG0607DC


XCMG SOLID TO SUCCEED


Scissor Lift-Electric

Item	Metric
Dimension	
Max. Working Height (Indoor/Outdoor)	5.9/0 m
Max. Platform Height (Indoor/Outdoor)	3.9/0 m
Min. Platform Height	0.9 m
Max. Platform Drive Height	3.9 m
Overall Length (Without Ladder/Outriggers)	1450(1290) mm
Overall Width	760 mm
Overall Height (Platform Folded)	2020(1660) mm
Platform Length	1290 mm
Platform Width	700 mm
Platform Extension Length	600 mm
Wheelbase	1030 mm
Min. Ground Clearance (Pothole Protection Deployed/Undeployed)	15/65 mm
Tire Size	φ254mm×76 mm
Performance	
Rated Load	240 kg
Load On Platform Extension	100 kg
Max. Platform Occupancy (Indoor/Outdoor)	2/0
Max. Driving Speed (Stowed)	4 km/h
Max. Driving Speed (Raised)	0.5 km/h
Max. Gradeability	25%
Min. Turning Radius (Inside)	0.4 m
Min. Turning Radius (Outside)	1.55 m
Platform Raising Time	27-37 s
Platform Lowering Time	23-33 s
Max. Working Slope (Side To Side/Front And Rear)	1.5°/3°
Tire Ground Pressure	6.23 kg/cm²
Driving Wheels	2
Braking Wheels	2
Steering Wheels	2
Power Source	
Battery Voltage	24 V
Battery Capacity	80 Ah
Battery Charger	24/15 V/A
Traveling Motor	0.45/24 kW/V
Lifting Motor	1.3/24 kW/V
Hydraulic Oil Capacity	
Hydraulic Tank Capacity	4L
Weight	
Machine Weight	900kg

Trans

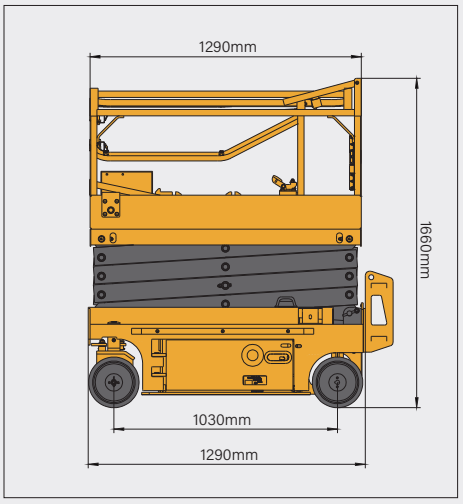

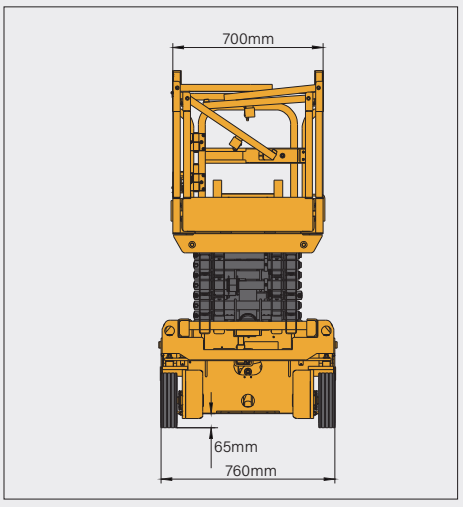

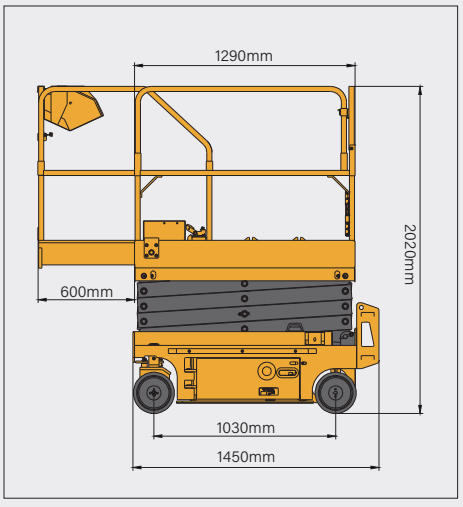

The print does not belong to the contract, nor a part of the commercial contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvment requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product. The final interpretation rights belong to XCMG.