XCMG | SOLID TO SUCCEED

CE

SCISSOR LIFT
XG2212AC

Standard configuration

Work Area
- Withdrawable Platform Extension With Position Lock
- Lanyard Attach Points
- Self-Locking Half-Height Swing Gate And Folding Guardrail

Drive
- 4-Wheel Drive
- 4-Wheel Steering

Performance
- All-AC Motors
- Full Proportion Travel And Lift Control
- 25 % Gradeability

Power
- DC Lead-Acid Battery

Safe
- Emergency Stop Devices On Platform And Ground Controls
- Anti-Slipping Metal Platform
- Load Sensing Alarm System
- Descent Alarm
- 3-Second Descent Delay
- Multi-Axis Tilt Sensor
- Multi-Disc Brake
- Boom Maintenance Lock
- Auto Brake System
- Fault Diagnosis System
- Electric Horn
- Automatic High-Altitude Speed-Limit Protection
- Charging Protection System
- Tilt Protection System
- Outrigger Leveling System
- Emergency Descent System
- Travel Motor Monitoring And Protection System
- Emergency Pump

Other Features
- Removable Platform Control
- Intelligent Charger
- Hourmeter
- Flashing Indicator Light
- User-Friendly Control System
- Platform Control With Battery Level Display
- Brake Release For Towing
- Full-Height Driving

Working height
22 meters

Lift capacity
750Kg

Electric
power



Optional configuration

- Platform Searchlight
- Platform External Power Supply
- Air Line
- Platform Fire Extinguisher
- Platform Foot Pedal

BMD KRAN-TRANS D.O.O.

Sedmog Jula 23b, 11262 Velika Moštanica, Beograd, Srbija
info@bmdkrantrans.rs


XG2212AC


XCMG SOLID TO SUCCEED

Scissor Lift-Electric


Item	Metric
Dimension	
Max. Working Height	22m
Max. Platform Height	20m
Min. Platform Height	2.65m
Maximum Drive Height	20m
Overall Length (Without Ladder/Outriggers)	4720mm(-)
Overall Width	1250mm
Overall Height (Platform Folded)	3810(3040)mm
Platform Length	4300mm
Platform Width	1190mm
Platform Extension Length	1800mm
Outrigger Span (Side To Side/ Front And Rear)	1060mm/4386mm
Wheelbase	3180mm
Minimum Ground Clearance (Stowed / Deployed)	200mm/20mm
Tire Size	φ714mm×257mm
Performance	
Rated Load	750kg
Load On Platform Extension	750kg
Max. Platform Occupancy (Indoor/Outdoor)	2/2
Max. Driving Speed (Stowed)	3.5km/h
Max. Driving Speed (Raised)	0.4km/h
Max. Gradeability	25%
Min. Turning Radius (Inside)	1.6m
Min. Turning Radius (Outside)	2.5m
Platform Raising Time	90s
Platform Lowering Time	95s
Max. Working Slope (Side To Side/Front And Rear)	1°(0°)/1°(0°)
Tire Ground Pressure	5.84kg/cm²
Driving Wheels	4
Braking Wheels	4
Steering Wheels	4
Power Source	**Flooded Lead-Acid Battery**
Battery Voltage	48V
Battery Capacity (5HR)	630Ah
Battery Charger	48/60V/A
Traveling Motor	3.4/32kW/V
Lifting Motor	18/34kW/V
Hydraulic Oil Capacity	
Hydraulic Tank Capacity	130L
Weight	
Machine Weight	12500kg

Trans

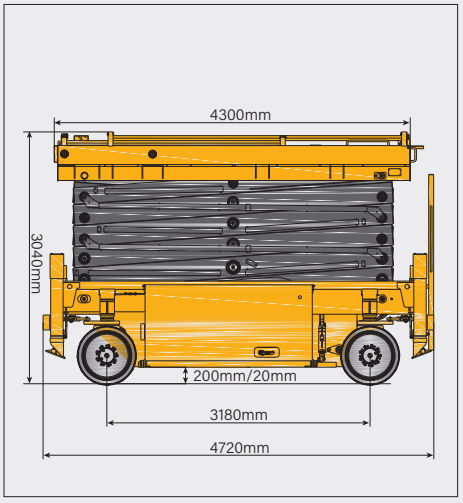

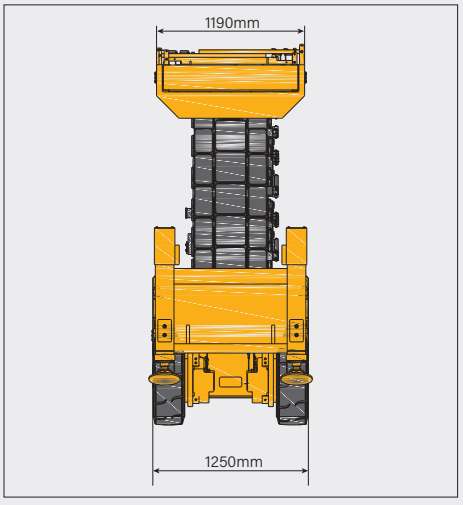

Platform Extd

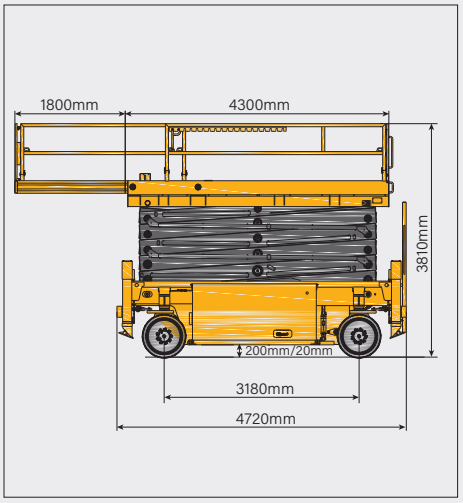

The print does not belong to the contract, nor a part of the commercial contract.We reserve the right to revise the product model, parameters, configuration based on the continuous improvment requirements of the product, without prior notice.Pictures are for reference only, and the specific product shall depend on the real product.The final interpretation rights belong to XCMG.