XCMG | SOLID TO SUCCEED

TELESCOPIC BOOM LIFT
XGS32K

Standard configuration

Work Area
- Tri-Entry Platform With Side Swing Gate

Power
- Cold Start Components
- Engine Intake Air Pre-Filter Assembly
- Engine Condition Monitoring And Start Protection Device

Drive
- Axle Oscillation

Safe
- Descent And Motion Alarm
- Tilt Alarm
- Horn With Adjustable Volume
- Emergency Stop Devices On Platform And Chassis
- Emergency Power Unit
- Axle Oscillation Pressure Detection System
- 4-Wheel Braking System

Other Features
- Automatic Leveling System
- Proportional Joystick Control
- Drive Enable
- Two-Speed Drive
- Telematics Front-End Interface
- Anti-Entrapment System
- Hydraulic Oil Cooler
- Swing-Out Engine Tray
- Hostile Environment Package
- Thumb Rocker Steering
- Platform Power
- Tool Tray

Working height
32.6 meters

Lift capacity
300/460kg

Diesel
power



Optional configuration

- Foam-Filled Tires (Φ995mm×380mm)
- Air Line
- Mechanical Anti-Entrapment Device
- Working Light Assembly
- Fall Arrest Assembly
- Platform Anti-Squeeze Auxiliary Rail
- Platform Half-Mesh

BMD KRAN-TRANS D.O.O.


Sedmog Jula 23b, 11262 Velika Moštanica, Beograd, Srbija
info@bmdkrantrans.rs

XGS32K


SOLID TO SUCCEED


Telescopic Boom Lift-Engine Powered

Item		Metric
Dimension		
Overall Dimension - Stowed	Length	13100mm
	Width	2490mm
	Height	2900mm
Overall Dimension - Transported	Length	13100mm
	Width	2490mm
	Height	2900mm
Platform Dimensions	Length	2400mm
	Width	900mm
	Height	1150mm
Wheelbase		3000mm
Jib Length		1850mm
Min. Ground Clearance		400mm
Performance		
Max. Working Height		32.6m
Max. Platform Height		30.6m
Max. Outreach		20m
Max. Lift Capacity		300/460kg
Max. Platform Occupancy		2/3
Max. Chassis Allowable Angle		X-5°/ Y-5°
Telescopic Boom Luffing Range		-4°~73°
Fly Boom Luffing Range		-65°~70°
Turntable Rotation		360°
Platform Rotation		160°
Machine Weight		18500kg
Driving Speed (Stowed)		5.5km/h
Driving Speed (Raised Or Extended)		0.6km/h
Min. Turning Radius (Inside/Outside)		4400mm/6250mm
Turntable Tailswing (Stowed)		2030mm
Max. Gradeability (Counterweight Uphill)		45% (24°)
Power source		
Control		12 V DC proportional control
Emergency Power Supply		12V/200Ah
Engine Model		Kubota V2607-CR-T-EW03
Engine Power / Rpm		47.3kW/(2400r/min)
Max. Engine Torque		221.7N · m/(1500r/min)
Engine Emission Standard		EU Ⅴ
Hydraulic Tank Capacity (Effective Volume)		170 L
Fuel Tank Capacity		180 L
Tire		
Tire Size		φ1000mm×388mm
Tire Ground Pressure		8.92kg/cm²
Driving Wheels		4
Braking Wheels		4
Steering Wheels		2

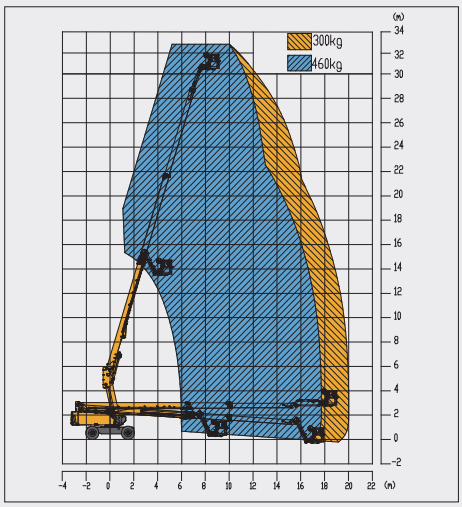



Stowed

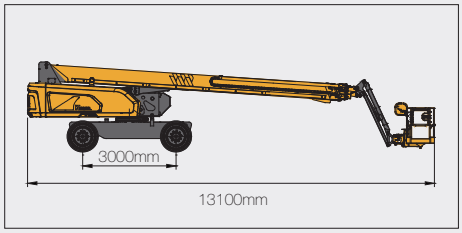

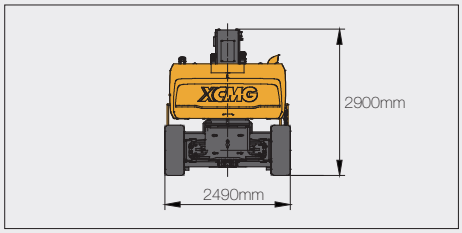

Trans

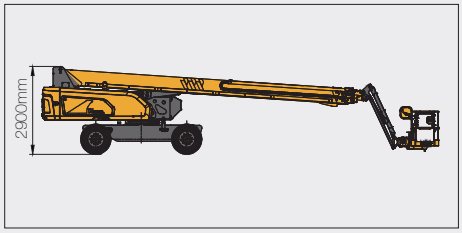

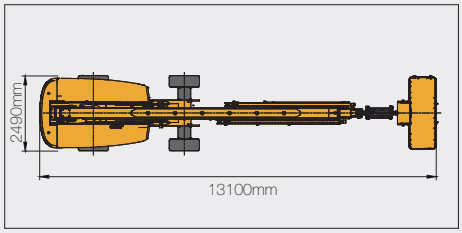

The print does not belong to the contract, nor a part of the commercial contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvment requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product. The final interpretation rights belong to XCMG.